




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>3</sup> : <b>G06F 9/36, 9/32, 1/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 83/ 00240</b> (43) International Publication Date: <b>20 January 1983 (20.01.83)</b>
(21) International Application Number: <b>PCT/US82/00468</b> (22) International Filing Date: <b>14 April 1982 (14.04.82)</b> (31) Priority Application Number: <b>282,919</b> (32) Priority Date: <b>13 July 1981 (13.07.81)</b> (33) Priority Country: <b>US</b> (71) Applicant: <b>BURROUGHS CORPORATION [US/US];</b> <b>Burroughs Place, Detroit, MI 48232 (US).</b> (72) Inventors: <b>GAITHER, Blaine, Douglas ; 30 Vista Circle</b> <b>Drive, Sierra Madre, CA 91024 (US). FARLEY, IV.,</b> <b>William, Wallace ; 1290 Fairlawn Way, Pasadena, CA</b> <b>91105 (US). JOHNSON, Albert ; 1255 East Altadena</b> <b>Drive, Altadena, CA 91101 (US). PARKER, Brian,</b> <b>Leslie ; 1214 Dominion Avenue, Pasadena, CA 91104</b> <b>(US).</b>	(74) Agents: <b>AUSGSPURGER, Lynn, L. et al. ; Burroughs</b> <b>Corporation, Patent Division, 4B28, Burroughs Place,</b> <b>Detroit, MI 48232 (US).</b> (81) Designated States: <b>BE (European patent), DE (Euro-</b> <b>pean patent), FR (European patent), GB (European</b> <b>patent), JP, NL (European patent).</b> Published <i>With international search report.</i>	

## (54) Title: EXTENDED ADDRESS GENERATING APPARATUS AND METHOD

## (57) Abstract

Address generating apparatus which uses narrow data paths for generating a wide logical address and which also provides for programs to access very large shared data structures outside their normally available addressing range and over an extended range of addresses. Selective indexed addressing (16) is employed for providing index data which is also used for deriving variable dimension override data. During address generation, selected index data (16a) is added to a displacement (D) provided by an instruction for deriving a dimension override value (15b) as well as an offset (15a). The derived dimension override value is used to selectively access an address locating entry in a table of entries (25) corresponding to the applicable program. The resulting accessed address locating entry (SEG. B) is in turn used to determine the particular portion of memory against which the offset is to be applied.

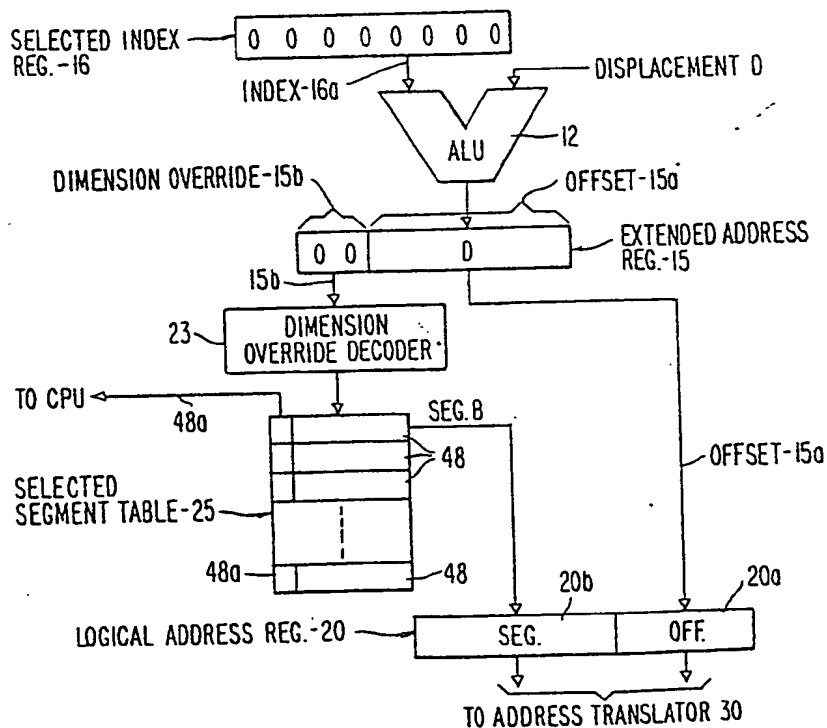

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KP	Democratic People's Republic of Korea
AU	Australia	LI	Liechtenstein
BE	Belgium	LK	Sri Lanka
BR	Brazil	LU	Luxembourg
CF	Central African Republic	MC	Monaco
CG	Congo	MG	Madagascar
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America

- 1 -

TITLE

EXTENDED ADDRESS GENERATING APPARATUS AND METHOD

CROSS REFERENCE TO RELATED PATENT APPLICATION

5 This application contains subject matter relating to our commonly assigned patent application S.N. \_\_\_\_\_, filed \_\_\_\_\_, for ADDRESS GENERATING APPARATUS AND METHOD, B. Gaither, et al., inventors.

BACKGROUND OF THE INVENTION

10 This invention relates generally to improved methods and apparatus for generating a memory address in a data processing system and more particularly to improved methods and apparatus for generating a relatively large virtual or logical address in a data processing system employing virtual or mapped data storage. The most direct approach to generating a large address is to provide a data  
15 processor having sufficiently wide data paths to accommodate all of the bits of the address. However, the hardware required for such an approach would be quite expensive.

Another known approach is to provide relatively narrow data paths in the data processor and to then provide



- 2 -

for making multiple passes of these narrow data paths in order to manipulate addresses wider than the data paths. The difficulty with this multiple pass approach is that the requirement for these multiple passes results in a significant slow-down in operating speed.

One way of overcoming the disadvantages of the multiple pass approach summarized above is disclosed in U.S. Patent No. 4,251,860 issued February 17, 1981, G.R. Mitchell et al., inventors. In this patent, an embodiment is disclosed which permits the use of relatively narrow data widths while avoiding the need for multiple passes in order to produce a large virtual address. This is accomplished by splitting the base address registers which contain the data that is used to form the virtual address into segment registers and offset registers. Then, operation is provided so that only the offset portion of a selected base address is required to participate in arithmetic operations in order to form a virtual address, thereby permitting narrow data paths to be used even though the generated virtual address is much wider.

Additional background information regarding addressing techniques can be found in U.S. Patent No. 4,240,139, issued December 16, 1980; in the article "Indexed Mapping Extends Microprocessor Addressing Range", Ian LeMair, Computer Design, August 1980, pp. 111-118; in the article "Storage Relocation Translator", P.L. Martinez, IBM Technical Disclosure Bulletin, Vol. 23, No. 5, October 1980, pp. 1785-1789; in the article "Relocation Translator Address Bit Scheme", P.L. Martinez, IBM Technical Disclosure Bulletin, Vol. 23, No. 6, November 1980, pp. 2199 and 2200; and in the references cited in the above patent and articles.

- 3 -

SUMMARY OF THE INVENTION

In a preferred embodiment of the present invention, a generally similar approach is employed as is disclosed in the aforementioned Patent No. 4,251,860 for permitting narrow data paths to be used for generating a much wider address without the need for multiple passes. However, the present invention goes significantly farther in providing very much more flexible and versatile address generating capabilities over an extended range of addresses and in a relatively simple and inexpensive manner.

Briefly, in a preferred embodiment of the invention, these added capabilities are achieved by employing indexing in a unique dual-purpose manner to provide a dimension override addressing option which permits a program to generate addresses which are able to access very large data structures outside of the normally available addressing range of the program and over an extended range of memory addresses.

The specific nature of the invention as well as other features, advantages, objects, and uses of the invention will become apparent from the following detailed description taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block and schematic diagram illustrating a preferred embodiment of the invention.

FIG. 2 illustrates an example of the operation of FIG. 1 wherein neither indexing nor dimension override are provided.

FIG. 3 is a graphical representation illustrating the results of the example of FIG. 2.

- 4 -

FIG. 4 illustrates an example of the operation of FIG. 1 wherein indexing is provided without dimension override.

5       FIG. 5 is a graphical representation illustrating the results of the example of FIG. 4.

FIG. 6 illustrates an example of the operation of FIG. 1 wherein both indexing and dimension override are provided.

10       FIG. 7 is a graphical representation illustrating the results of the example of FIG. 6.

- 5 -

DETAILED DESCRIPTION OF THE INVENTION

Like numerals and characters represent like elements throughout the figures of the drawings.

In prior art virtual or logical address systems, such as disclosed in the aforementioned Patent No. 4,251,860, it is typical to consider memory storage as being divided into identifiable regions commonly referred to as blocks or segments, each segment providing enough addresses so that programs or data stored in them will not try to assign the same addresses more than once. These segments are typically referenced by a two-part logical address, the first part identifying a particular one of the segments, and the second part identifying an offset within the segment.

In the embodiment disclosed in the aforementioned Patent No. 4,251,860, the generation of a virtual address from an instruction involves the use of a base register field provided by the instruction to select a base address comprised of segment and offset values which are split up into separate segment and offset registers, these segment and offset values together constituting the selected base address. A displacement field which is also provided by the instruction is then added to the value contained in the selected offset register to provide a resultant offset value which is concatenated with the segment portion of the base address contained in the selected segment register to form the desired virtual address. Since only the offset portion of the selected base address need be added to the displacement field to form the virtual address, much narrower data paths are required than would otherwise be possible.

Although the virtual address generation approach disclosed in the aforementioned Patent No. 4,251,860 permits a large virtual address to be generated using relatively



- 6 -

narrow data paths, it will be evident that the virtual address which can be generated by an instruction is limited to the adding of the instruction's displacement field to a particular base address selected by the instruction's base register field. If an overflow is detected, indicating that the resulting address encroaches on the next segment, operation is aborted. It will thus be understood that the address range which each instruction can access using the approach disclosed in Patent No. 4,251,860 is limited to a single segment. The preferred embodiment of the present invention illustrated in FIG. 1 maintains the narrow data path advantages of Patent No. 4,251,860 while, on the other hand, making it possible for the same instruction to generate addresses capable of accessing data in a plurality of different segments, as will become evident from the description which follows.

Thus, referring to FIG. 1, it will be understood that, as typically occurs during data processing operations, an instruction to be processed is fetched and placed in an instruction register 10. As shown, a typical instruction includes an opcode OP which designates the operation to be performed, and an address portion comprised of an index I and a displacement D which, as will be described hereinafter, together cooperate in the generation of a virtual or logical address. Typically, the opcode OP is sent to the data processor's execution unit (not shown) for performance of the operation designated by the opcode on the data in memory corresponding to the generated address. The particular manner in which such execution may be performed is not part of the present invention.

Still with reference to FIG. 1, it will be seen that the displacement D of the instruction in the instruction



- 7 -

register 10 is applied to the right input of an arithmetic and logic unit (ALU) 12, while the index selector IS is applied to an index decoder 14 whose output selects a particular one of a plurality of index registers 16. The selected index 16a is applied to the left side of the ALU 12 for addition with the displacement D from the instruction register 10. The resulting sum at the output of the ALU 12 is stored in an extended address register 15 having an offset portion 15a and a dimension override portion 15b.

It will be understood that, depending on the address range which it is desired to permit an instruction to access, the extended addressing register 15 is preferably made wide enough to accommodate the largest sum appearing at the output of the ALU 12 without overflow.

As indicated in FIG. 1, the offset portion 15a in the extended address register 15 is the offset value of the desired virtual or logical address and is loaded into the offset portion 20a of a logical address register 20. The dimension override portion 15b is used to derive the segment which is loaded into the segment portion of the logical address register 20. More specifically, as will be understood from FIG. 1, the dimension override portion 15b of the extended address register 15 is applied to a dimension override decoder 23 which also receives a program number signal indicative of a particular one of a plurality of programs being run by the processor. The program number causes this dimension override decoder 23 to select a particular one of a plurality of segment tables (one for each program being run), and the dimension override portion 15b causes the dimension override decoder 23 to select a particular segment entry 48 in the selected segment table. It will be understood that these segment tables 25 may be



- 8 -

provided as part of the CPU's main storage or as separate hardware of firmware.

Each of the segment tables 25 in FIG. 1 includes a plurality of segment entries 48 designating the particular storage segments which its respective program will be permitted to access. These segment entries 48 need not correspond to contiguous portions in real memory. Since one or more of these segment entries 48 may be privileged and/or shared by other programs, each segment entry 48 includes a segment check bit 48a which is sent to the CPU to permit appropriate action to be taken in the event the selected segment is invalid or unavailable. Such action may, for example, include interrupting the program until the selected segment becomes available.

Assuming that the segment check bit 48a indicates that the selected segment entry 48 in the selected segment table 25 is valid and available, the dimension override decoder 23 then causes this selected segment entry 48 to be read out into the segment portion 20b of the logical address register 20. The concatenated offset and segment in the respective offset and segment portions 20a and 20b of the logical address register 20 thus constitute the full logical address which is applied to an address translator 30 (which may be of conventional form) for translation or mapping into a physical address which is then applied to the CPU main storage 40.

The versatility and flexibility of the address generation approach of the present invention will now be demonstrated with reference to the examples illustrated in FIGS. 2-7 along with FIG. 1. For these examples, it will be assumed that the selected segment entry loaded into the segment portion 20b of the logical address register corresponds to the base address of a segment, that the offset

- 9 -

loaded into the offset portion 20a is the offset within this segment, and that the address translator 30 concatenates these portions 20a and 20b to obtain the real address in the CPU main storage 40. However, it is to be understood that the present invention is also applicable for use with other types of address translation techniques for deriving a real address in response to the contents of portions 20a and 20b.

FIGS. 2 and 3 illustrate an example where neither indexing nor dimension override is called for by an instruction, as indicated by the selected index register 16 (selected by the index selector 15 in the instruction register 10 in FIG. 1) being all zeroes. Typically, each index register 16 may comprise eight binary coded decimal digits. For the case where the selected index register 16 is all zeroes, as illustrated in FIG. 2, the resulting sum loaded into the extended address register 15 is merely the displacement D in the instruction register 10 in FIG. 1. Ordinarily, the maximum value of the displacement D is not large enough to cause any carry over into the dimension override portion 15b of the extended address register 15 so that the dimension override portion 15b will remain at an all zero value, as illustrated in FIG. 2. Typically, the offset portion 15a of the extended address register may comprise six binary coded decimal digits, while the dimension override portion 15b may comprise two binary coded decimal digits.

The all zero value of the dimension override portion 15b in the extended address register 15 selects (via the dimension override decoder 23) the first one of the entries 48 in the segment table 25 corresponding to the current program number. This first entry, which is loaded into the segment portion 20b of the logical address register 20, is merely the base address of segment B which will be



- 10 -

assumed to be assigned to the current program. The resulting address in segment B is diagrammatically illustrated in FIG. 3.

Considering next the example shown in FIGS. 4 and 5, this example illustrates a situation where indexing is being called for without dimension override. As shown in FIG. 4 the selected index register 16 is, for example, assumed to be 00012163, and the displacement D is, for example, assumed to be 900054. The sum provided by the ALU 12 is thus 912217. The dimension override portion 15b in the extended address register 15 thus remains all zeroes since the sum 912217 provides no carry over into the dimension override portion 15b. Accordingly, the first entry of the segment table 25 is again selected, causing the segment B base register address to again be loaded into the segment portion 20b of the logical address register 20 so as to point to the segment B base address, while the sum 912217 in the offset portion 15a of the extended address register 15 is loaded into the offset portion 20a of the logical address register 20. A typical resulting address is illustrated in FIG. 5.

The last example to be considered is shown in FIGS. 6 and 7 and illustrates the situation where both indexing and dimension override are being called for. This is indicated in FIG. 5 where the index in the selected index is now assumed to have the larger value 1142131, while the displacement D is again assumed to be 900054. Since the sum now provided at the output of the ALU 12 is 02042185, there is a carry over of 02 into the dimension override portion 15b of the extended address register 15. Thus, the dimension override portion 15b now loads into the segment portion 20b of the logical address register 20, the third entry in the segment table 25 corresponding, for example, to the base address of a segment Q. This segment Q may, for example,

- 11 -

contain a portion of a large table or other large data structure which is shared by a number of programs and which is too large for inclusion in any one of the program's assigned segments. A typical resulting logical address in segment Q is illustrated in FIG. 7. Of course, if the check bit 48a of the selected entry 48 indicates that it is invalid or unavailable, then the CPU will abort the operation, which may be accomplished in a conventional manner.

It will be understood from the example of FIGS. 6 and 7 that, since the value loaded into the dimension override portion 15b of the extended address register 15 is the carry over from the sum of the displacement D and the selected index register 16, there is no need to restrict or abort the translation when overflow occurs, as is the case, for example, in the aforementioned Patent No. 4,251,860, thereby permitting a greatly extended range of addresses to be accessed by an instruction.

Although the present invention has been described in connection with a particular illustrative embodiment, it will be understood that many variations in construction, arrangement and use are possible within the scope of the invention. For example, the present invention is applicable for use with mapped memory as well as virtual memory and various other types of memory organizations.

The present invention is thus to be considered as including all possible modifications and variations encompassed within the scope of the appended claims.



- 12 -

What is claimed is:

1. In a data processing system having a memory and an address translator, improved apparatus for generating a logical address for use by said translator in accessing said memory, said apparatus comprising:

5 means for storing data indicative of a logical address, said data including index selection data and displacement data;

a plurality of index registers each including index data; means responsive to said index selection data for selecting

10 one of said index registers;

an extended address register;

means including an adder for adding the index data in a selected index register to said displacement data and for storing the sum in said extended address

15 register; a logical address register having first and second portions; means for storing a predetermined number of the least significant digits of the sum in said extended address register in said first portion of said

20 logical address register; table storing means for storing a table containing a plurality of address locating entries corresponding to at least one program performable by said system;

dimension override selection means responsive to a predetermined number of the most significant digits

25 of the sum in said extended address register for accessing a corresponding one of the address locating entries in said table and for storing the accessed entry in said second portion of said

30 logical address register; and

means for applying the contents of the first and second portions of said logical address register to said address translator.

- 13 -

2. The invention in accordance with claim 1, wherein said predetermined number of said most significant digits concatenated with said predetermined number of said least significant digits constitute the sum in said extended address register.

3. The invention in accordance with claim 2, wherein said displacement data has a value which is not large enough by itself to cause a carry over into said predetermined number of predetermined digits in said extended address register.

4. The invention in accordance with claim 1, wherein said table storing means provides for storing a respective plurality of address locating entries for each of a plurality of programs performable by said system, and wherein said dimension override selection means is also responsive to a program indication for accessing a corresponding address locating entry in a table corresponding to a particular program.

5. The invention in accordance with claim 1, wherein said means for storing data indicative of a logical address is an instruction register additionally containing operation data indicating a type of operation to be performed on data located at said logical address.

6. The invention in accordance with claim 1, 2, 3, 4 or 5, wherein said memory includes a plurality of segments, and wherein each data locating entry in a table is indicative of the base address of a particular segment.



- 14 -

7. The invention in accordance with claim 6, wherein a table corresponding to a program includes address locating entries corresponding to the base addresses of segments assigned to the program, and wherein the table  
5 also includes at least one address locating entry corresponding to the base address of a segment which is shared with another program.

8. The invention in accordance with claim 7, wherein each address locating entry includes check data indicating the status thereof.

9. The invention in accordance with claim 6, wherein said predetermined number of the least significant digits in said extended address register determines the resultant location accessed in the segment indicated by the selected  
5 address locating entry.



- 15 -

10. In a data processing system having a memory and an address translator, an improved method for generating a logical address for use by said translator in accessing said memory, said method comprising:

5 providing index selection data and displacement data indicative of a logical address;  
selecting one of a plurality of index values in response to said index selection data;  
adding said displacement data to a selected index  
10 value to form a sum;  
selecting in response to a predetermined number of the most significant digits of said sum an address locating entry from a table of such entries provided for each of a plurality of programs performable by  
15 said system; and  
applying the selected address locating entry along with the remaining digits of said sum to said address translator:

11. The invention in accordance with claim 10, wherein said displacement data has a value which is not large enough by itself to cause a carry over into said predetermined number of predetermined digits.

12. The invention in accordance with claim 11 or 12, wherein said memory includes a plurality of segments, and wherein each data locating entry in a table is indicative of the base address of a particular segment.






- 16 -

13. The invention in accordance with claim 12, wherein a table corresponding to a program includes address locating entries corresponding to the base addresses of segments assigned to the program, and wherein the table  
5 also includes at least one address locating entry corresponding to the base address of a segment which is shared with another program.



14. The invention in accordance with claim 13, wherein said remaining digits of said sum determines the resultant location accessed in the segment indicated by the selected address locating entry.





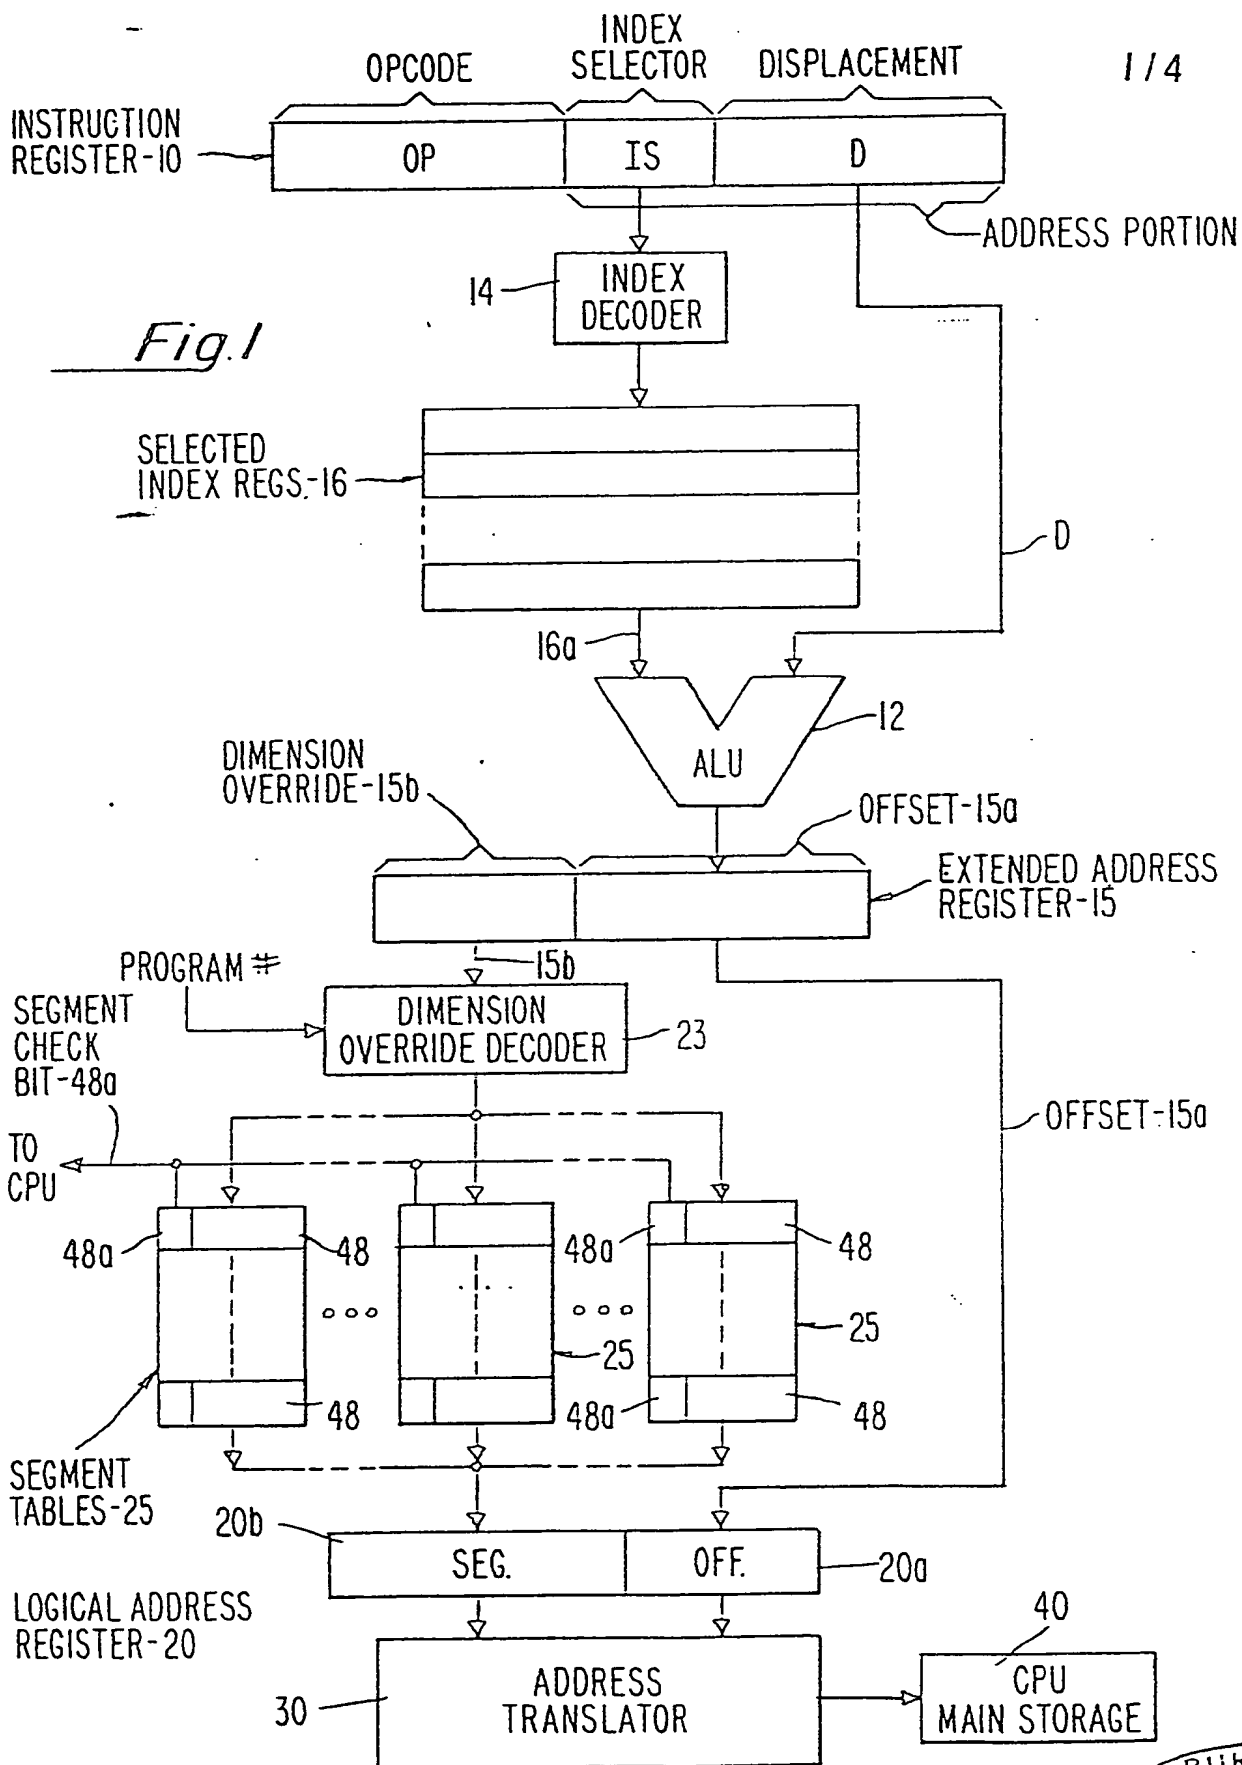

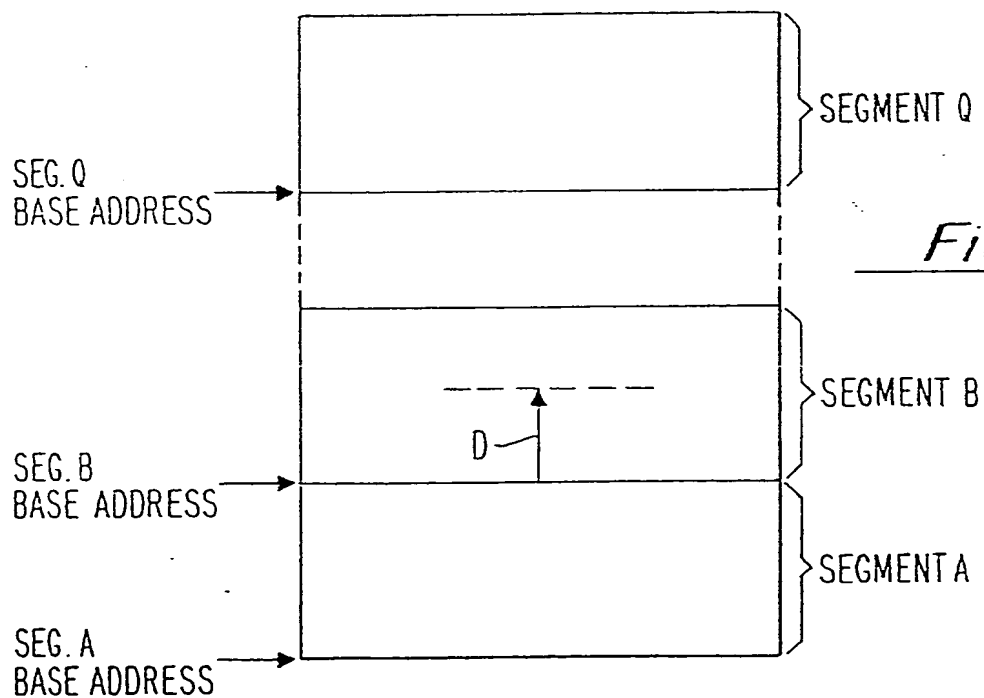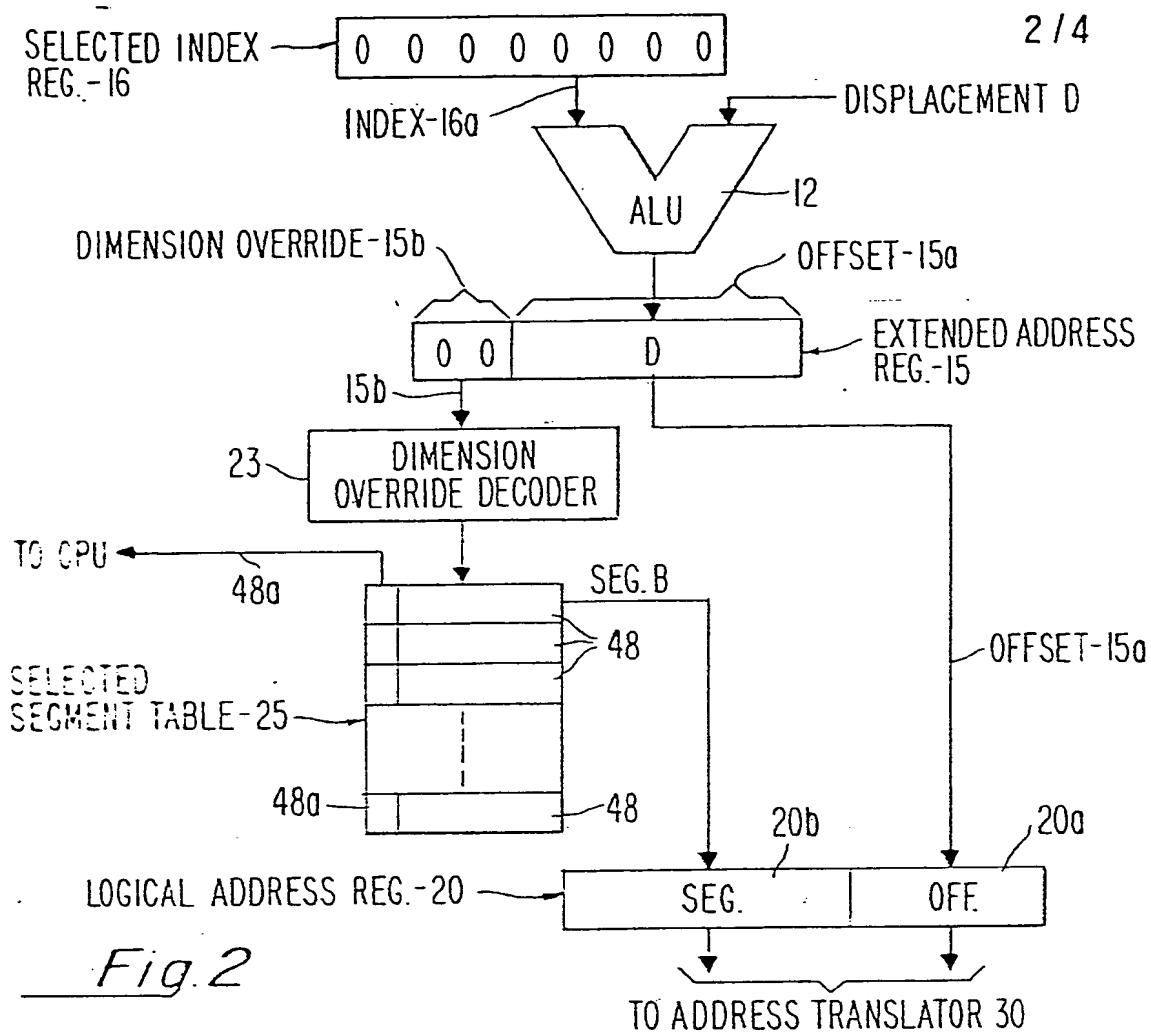

3/4

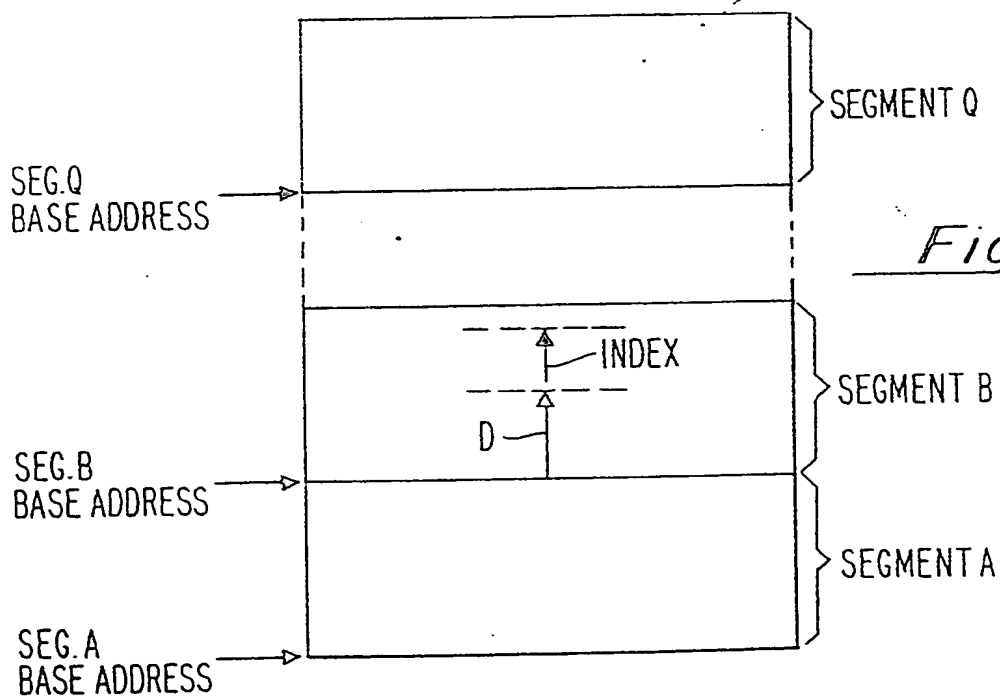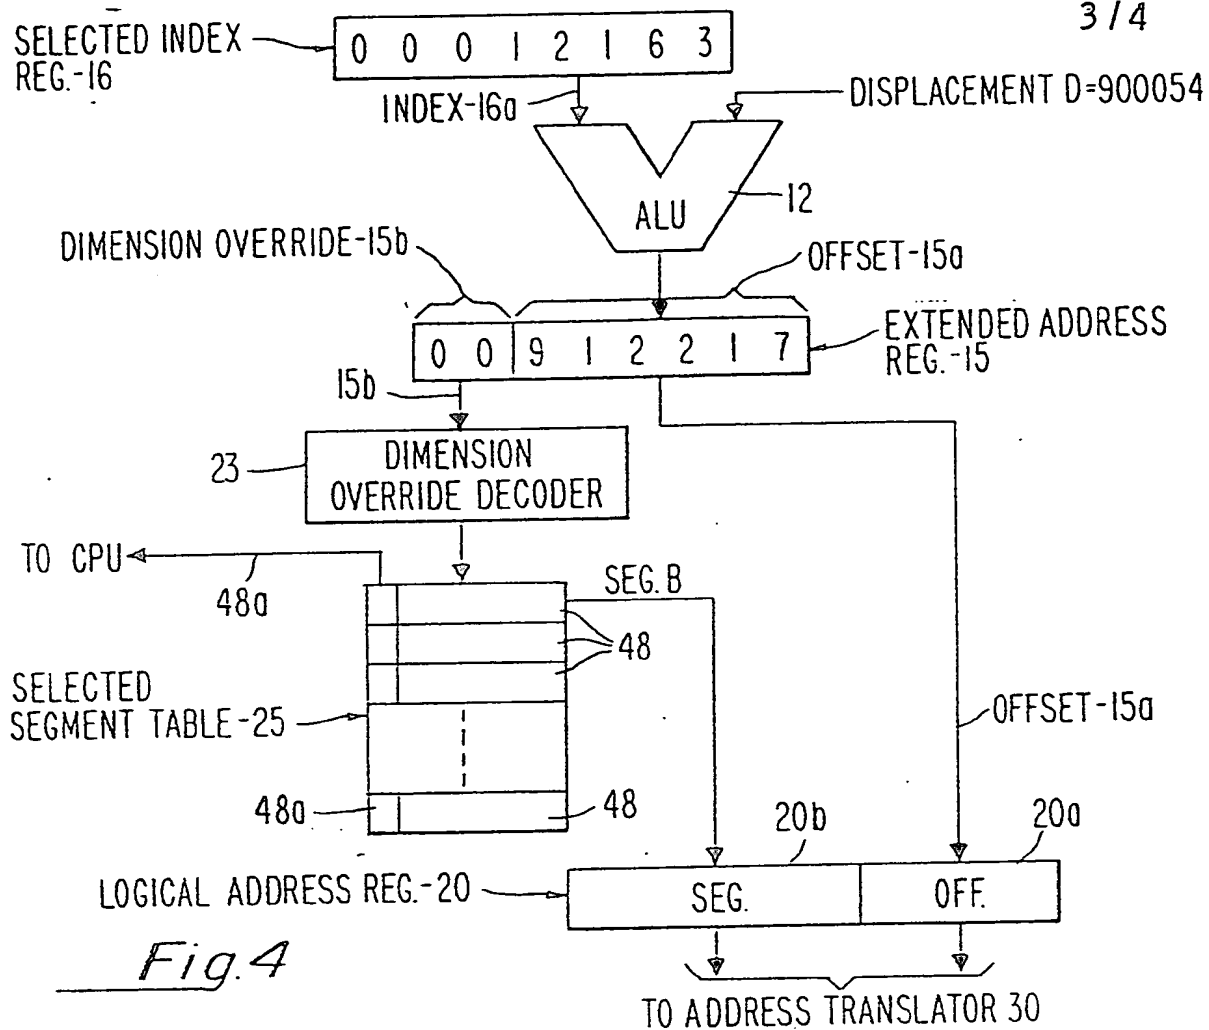

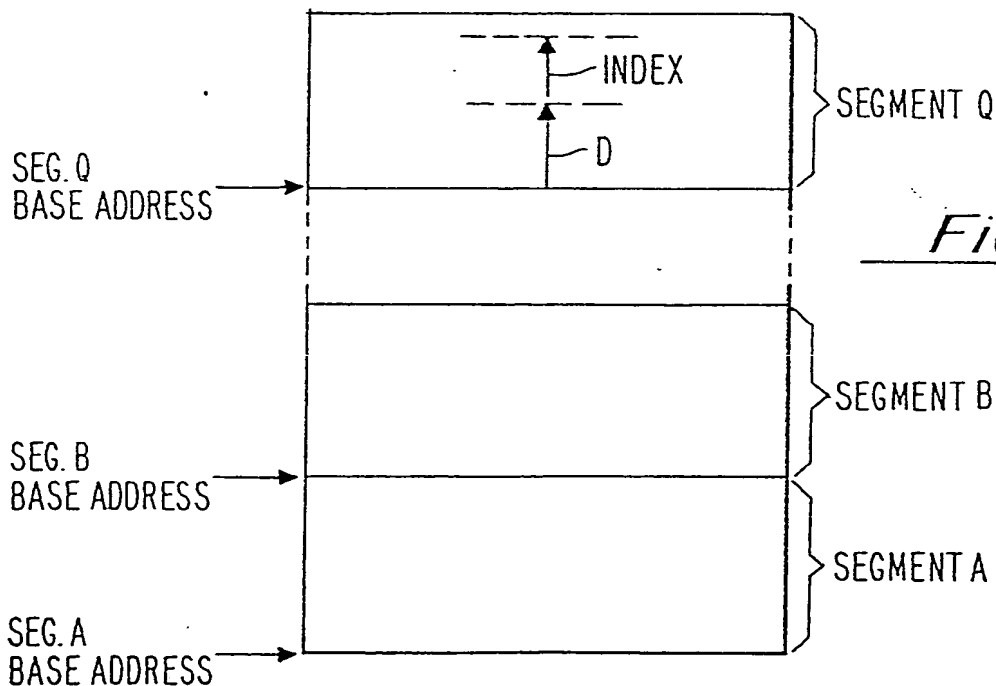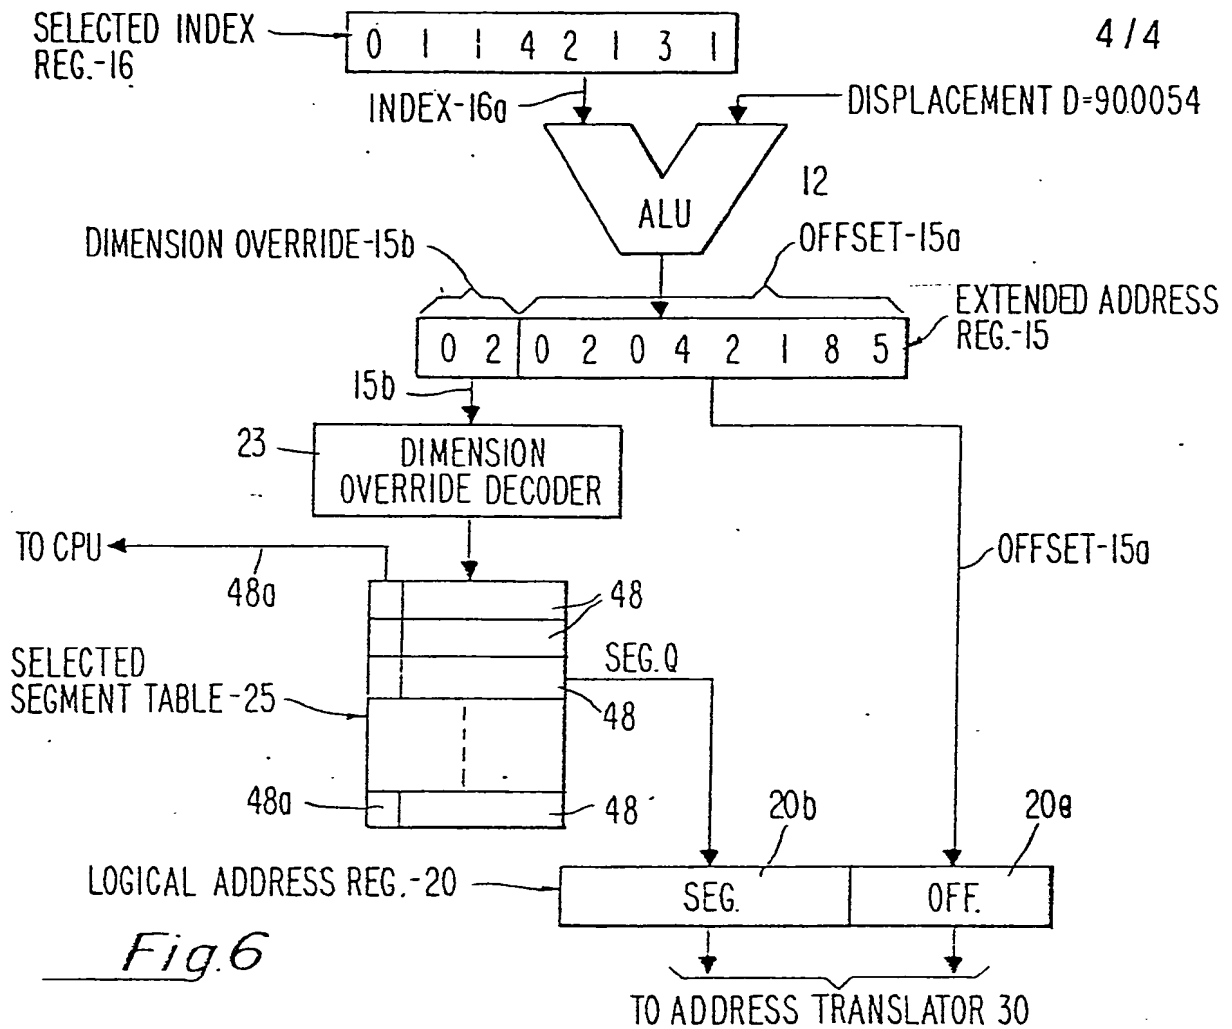

# INTERNATIONAL SEARCH REPORT

International Application No PCT/US82/00468

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (If several classification symbols apply, indicate all) <sup>1</sup> According to International Patent Classification (IPC) or to both National Classification and IPC <div style="text-align: center; font-family: monospace; font-size: 1.2em;">Int. Cl.<sup>3</sup> G06F 9/36, 9/32, 1/00</div>																																
<b>II. FIELDS SEARCHED</b> <div style="text-align: center; font-size: 0.8em;">Minimum Documentation Searched <sup>4</sup></div> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%; padding: 5px;">Classification System</td> <td style="padding: 5px;">Classification Symbols</td> </tr> <tr> <td style="text-align: center; padding: 10px;">U. S.</td> <td style="text-align: center; padding: 10px;">364/200, 900</td> </tr> </table> <div style="text-align: center; font-size: 0.8em; margin-top: 5px;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>5</sup></div>			Classification System	Classification Symbols	U. S.	364/200, 900																										
Classification System	Classification Symbols																															
U. S.	364/200, 900																															
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>14</sup> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; padding: 5px;">Category <sup>6</sup></th> <th style="width: 70%; padding: 5px;">Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup></th> <th style="width: 20%; padding: 5px;">Relevant to Claim No. <sup>18</sup></th> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>US, A, 4,251,860 Published 17 February 1981, Mitchell et al</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>US, A, 4,240,139 Published 16 December 1980, Fukuda et al</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>US, A, 4,128,875 Published 05 December 1978, Thurber et al</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">X</td> <td>US, A, 3,902,163 Published 26 August 1975, Amdahl et al</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 4,155,119 Published 15 May 1979, De Ward et al</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 4,084,227 Published 11 April 1978, Bennett et al</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 3,725,874 Published 03 April 1973, Van Heel</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 4,057,848 Published 08 November 1977, Hayashi</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>US, A, 4,145,738 Published 20 March 1979, Incue et al</td> <td style="text-align: center; vertical-align: top;">1-14</td> </tr> </table>			Category <sup>6</sup>	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>	X	US, A, 4,251,860 Published 17 February 1981, Mitchell et al	1-14	X	US, A, 4,240,139 Published 16 December 1980, Fukuda et al	1-14	X	US, A, 4,128,875 Published 05 December 1978, Thurber et al	1-14	X	US, A, 3,902,163 Published 26 August 1975, Amdahl et al	1-14	A	US, A, 4,155,119 Published 15 May 1979, De Ward et al	1-14	A	US, A, 4,084,227 Published 11 April 1978, Bennett et al	1-14	A	US, A, 3,725,874 Published 03 April 1973, Van Heel	1-14	A	US, A, 4,057,848 Published 08 November 1977, Hayashi	1-14	A	US, A, 4,145,738 Published 20 March 1979, Incue et al	1-14
Category <sup>6</sup>	Citation of Document, <sup>16</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>																														
X	US, A, 4,251,860 Published 17 February 1981, Mitchell et al	1-14																														
X	US, A, 4,240,139 Published 16 December 1980, Fukuda et al	1-14																														
X	US, A, 4,128,875 Published 05 December 1978, Thurber et al	1-14																														
X	US, A, 3,902,163 Published 26 August 1975, Amdahl et al	1-14																														
A	US, A, 4,155,119 Published 15 May 1979, De Ward et al	1-14																														
A	US, A, 4,084,227 Published 11 April 1978, Bennett et al	1-14																														
A	US, A, 3,725,874 Published 03 April 1973, Van Heel	1-14																														
A	US, A, 4,057,848 Published 08 November 1977, Hayashi	1-14																														
A	US, A, 4,145,738 Published 20 March 1979, Incue et al	1-14																														
<div style="font-size: 0.8em;"> <sup>9</sup> Special categories of cited documents: <sup>13</sup>  <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><sup>10</sup> "A" document defining the general state of the art</p> <p><sup>11</sup> "E" earlier document but published on or after the international filing date</p> <p><sup>12</sup> "L" document cited for special reason other than those referred to in the other categories</p> <p><sup>13</sup> "O" document referring to an oral disclosure, use, exhibition or other means</p> </div> <div style="width: 45%;"> <p><sup>14</sup> "P" document published prior to the international filing date but on or after the priority date claimed</p> <p><sup>15</sup> "T" later document published on or after the international filing date or priority date and not in conflict with the application, but cited to understand the principle or theory underlying the invention</p> <p><sup>16</sup> "X" document of particular relevance</p> </div> </div> </div>																																
<b>IV. CERTIFICATION</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;">           Date of the Actual Completion of the International Search <sup>1</sup>   <div style="font-family: monospace; font-size: 1.2em;">18 June 1982</div> </td> <td style="width: 50%; padding: 5px;">           Date of Mailing of this International Search Report <sup>1</sup>   <div style="font-family: monospace; font-size: 1.2em;">14 JUL 1982</div> </td> </tr> <tr> <td style="padding: 5px;">           International Searching Authority <sup>1</sup>   <div style="font-family: monospace; font-size: 1.2em;">ISA/US</div> </td> <td style="padding: 5px;">           Signature of Authorized Officer <sup>1</sup>  </td> </tr> </table>			Date of the Actual Completion of the International Search <sup>1</sup>  <div style="font-family: monospace; font-size: 1.2em;">18 June 1982</div>	Date of Mailing of this International Search Report <sup>1</sup>  <div style="font-family: monospace; font-size: 1.2em;">14 JUL 1982</div>	International Searching Authority <sup>1</sup>  <div style="font-family: monospace; font-size: 1.2em;">ISA/US</div>	Signature of Authorized Officer <sup>1</sup> 																										
Date of the Actual Completion of the International Search <sup>1</sup>  <div style="font-family: monospace; font-size: 1.2em;">18 June 1982</div>	Date of Mailing of this International Search Report <sup>1</sup>  <div style="font-family: monospace; font-size: 1.2em;">14 JUL 1982</div>																															
International Searching Authority <sup>1</sup>  <div style="font-family: monospace; font-size: 1.2em;">ISA/US</div>	Signature of Authorized Officer <sup>1</sup> 																															

## FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

A	US, A, 4,054,945 Published 20 March 1979, Ichiko et al	1-14
A	N, IBM Tech. Discl. Bull. Vol. 23, No. 5, October '80, pp. 1785-1789; P.L. Martinez	1-14
A	N, IBM Tech. Discl. Bull. Vol. 23, No.6, November, '80, pp. 2199-2200; P.L. Martinez	1-14
A	N, Computer Design; August 1980 pp. 111-118, Ian Le Mair	1-14

VI ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE \*\*

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers \_\_\_\_\_, because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claim numbers \_\_\_\_\_, because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

VI ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING \*\*

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.

2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

## Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.  
☐ No protest accompanied the payment of additional search fees.